

Cambridge International AS & A Level

COMPUTER SCIENCE

9618/33

Paper 3 Advanced Theory

May/June 2024

MARK SCHEME

Maximum Mark: 75

Published

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge International will not enter into discussions about these mark schemes.

Cambridge International is publishing the mark schemes for the May/June 2024 series for most Cambridge IGCSE, Cambridge International A and AS Level and Cambridge Pre-U components, and some Cambridge O Level components.

This document consists of **14** printed pages.

PUBLISHED**Generic Marking Principles**

These general marking principles must be applied by all examiners when marking candidate answers. They should be applied alongside the specific content of the mark scheme or generic level descriptions for a question. Each question paper and mark scheme will also comply with these marking principles.

GENERIC MARKING PRINCIPLE 1:

Marks must be awarded in line with:

- the specific content of the mark scheme or the generic level descriptors for the question
- the specific skills defined in the mark scheme or in the generic level descriptors for the question
- the standard of response required by a candidate as exemplified by the standardisation scripts.

GENERIC MARKING PRINCIPLE 2:

Marks awarded are always **whole marks** (not half marks, or other fractions).

GENERIC MARKING PRINCIPLE 3:

Marks must be awarded **positively**:

- marks are awarded for correct/valid answers, as defined in the mark scheme. However, credit is given for valid answers which go beyond the scope of the syllabus and mark scheme, referring to your Team Leader as appropriate
- marks are awarded when candidates clearly demonstrate what they know and can do
- marks are not deducted for errors
- marks are not deducted for omissions
- answers should only be judged on the quality of spelling, punctuation and grammar when these features are specifically assessed by the question as indicated by the mark scheme. The meaning, however, should be unambiguous.

GENERIC MARKING PRINCIPLE 4:

Rules must be applied consistently, e.g. in situations where candidates have not followed instructions or in the application of generic level descriptors.

PUBLISHED**GENERIC MARKING PRINCIPLE 5:**

Marks should be awarded using the full range of marks defined in the mark scheme for the question (however; the use of the full mark range may be limited according to the quality of the candidate responses seen).

GENERIC MARKING PRINCIPLE 6:

Marks awarded are based solely on the requirements as defined in the mark scheme. Marks should not be awarded with grade thresholds or grade descriptors in mind.

Question	Answer	Marks																
1(a)	<p>One mark per mark point (Max 3) MP1 conversion of exponent 001001 to 9 MP2 application of exponent to mantissa to go from 0.100111100 to 100111100 // $256 + 32 + 16 + 8 + 4$ seen // $64/128 + 8/128 + 4/128 + 2/128 + 1/128 = 79/128$ // $1/2 + 1/16 + 1/32 + 1/64 + 1/128 = 79/128$ MP3 correct answer = 316</p>	3																
1(b)	<p>One mark per mark point (Max 3) MP1 number converted to binary 10011001.01 // number converted to positive 102.75, reversed bits and 1 added. $(0)1100110.11 \Rightarrow 10011001.00 \Rightarrow 10011001.01$ // $-128 + 16 + 8 + 1 + 0.25 = -102.75$ MP2 exponent = 7 // Moving binary point the correct number of places MP3 correct answer</p> <p>Mantissa Exponent</p> <table border="1" data-bbox="338 651 943 719"> <tr> <td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td> </tr> </table> <table border="1" data-bbox="1003 651 1364 719"> <tr> <td>0</td><td>0</td><td>0</td><td>1</td><td>1</td><td>1</td> </tr> </table>	1	0	0	1	1	0	0	1	0	1	0	0	0	1	1	1	3
1	0	0	1	1	0	0	1	0	1									
0	0	0	1	1	1													

PUBLISHED

Question	Answer	Marks				
2(a)	<p>Two marks for all protocols in correct position One mark for at least two protocols in correct position</p> <table border="1" data-bbox="338 316 696 579"> <tr> <td data-bbox="338 316 696 381">Application</td> </tr> <tr> <td data-bbox="338 381 696 446">Transport</td> </tr> <tr> <td data-bbox="338 446 696 512">Internet</td> </tr> <tr> <td data-bbox="338 512 696 579">Link</td> </tr> </table>	Application	Transport	Internet	Link	2
Application						
Transport						
Internet						
Link						
2(b)	<p>One mark per mark point (Max 2)</p> <p>MP1 The transport layer is responsible for delivery of data from the source host to the destination host</p> <p>MP2 It is where data is broken up into packets and sent to the internet layer</p> <p>MP3 Adds the sequence number to the packet header</p> <p>MP4 It establishes end to end contact</p> <p>MP5 It ensures data arrives error free // It retransmits packets if lost.</p>	2				
2(c)	<p>One mark for name of protocol and one mark for expansion (Max 2)</p> <p>HTTP(S) – responsible for correct transfer of files / hypertext documents that make up web pages on the world wide web</p> <p>FTP – used when transferring files from a server to a client on a network</p> <p>POP3 – handles the receiving of emails</p> <p>IMAP – handles the receiving of emails</p> <p>SMTP – handles the sending of emails</p> <p>BitTorrent – provides peer-to-peer file sharing</p>	2				

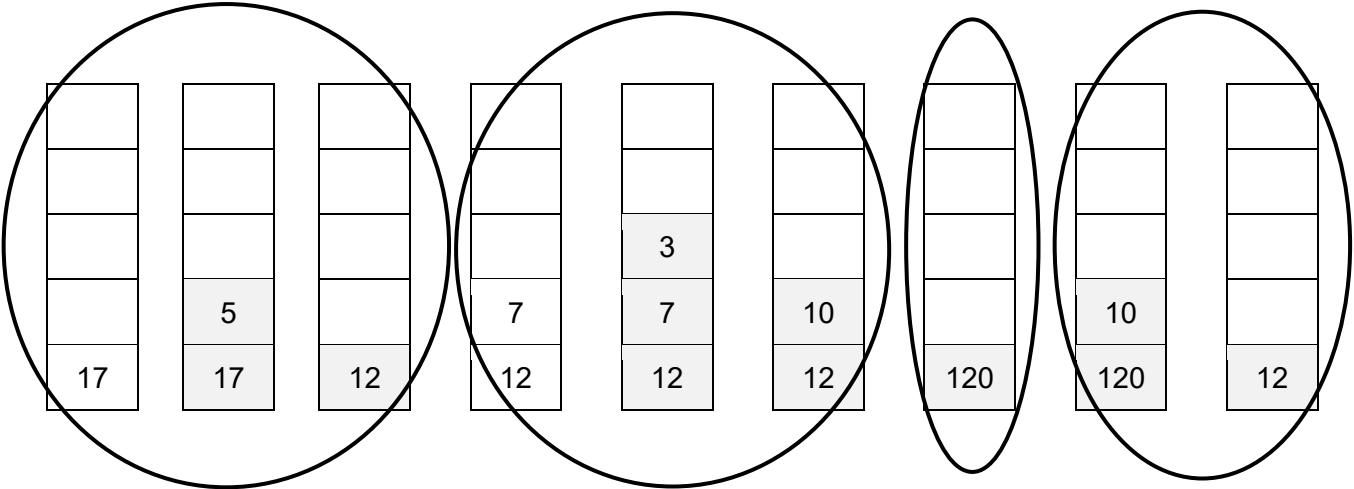
PUBLISHED

Question	Answer	Marks
3(a)	<p>One mark per mark point (Max 2) <i>non-composite data types</i> MP1 Non-composite data types can both be user-defined or primitive MP2 Non-composite data types do not refer to other data types in their definition / contain one data type in their definition MP3 Non-composite data types can be primitive/enumerated/pointer</p> <p>One mark per mark point (Max 2) <i>composite data types</i> MP4 Composite data types can be user-defined or primitive MP5 Composite data types refer to other data types in their definition/contain more than one data type in their definition MP6 Composite data types can be record/set/class</p>	3
3(b)	<p>One mark for TYPE FootballClub and ENDTYPE correct One mark for every two correct declarations</p> <p>Example answer</p> <pre> TYPE FootballClub DECLARE TeamName : STRING DECLARE DateOfJoining : DATE DECLARE MainTelephone : STRING DECLARE ManagerName : STRING DECLARE NumberOfMembers : INTEGER DECLARE LeaguePosition : INTEGER ENDTYPE </pre>	4

PUBLISHED

Question	Answer	Marks
4(a)	<p>One mark per mark point (Max 2)</p> <p>MP1 Sequential access method searches for records one after the other</p> <p>MP2 ... from the physical start of the file until the record is found/the end of file.</p>	2
4(b)	<p>One mark per mark point (Max 3)</p> <p>MP1 For serial files, records are stored in chronological order</p> <p>MP2 ... every record needs to be checked until the record is found, or all records have been checked.</p> <p>MP3 For sequential files, records are stored in order of a key field/index, and it is the key field/index that is compared.</p> <p>MP4 ... every record is checked until the record is found, or the key field of the current record is greater than the key field of the target record.</p>	3

Question	Answer	Marks
5(a)	<p>One mark per correct term (Max 3)</p> <p>(5 + 2) / (9 - 3) * 3</p> <p>Complete correct answer ((5 + 2) / (9 - 3)) * 3</p>	3
5(b)	<p>One mark 7 3 + One mark 2 8 * - 6 /</p> <p>Complete answer 7 3 + 2 8 * - 6 /</p>	2

Question	Answer	Marks
5(c)	<p>One mark per ring (Max 4)</p> 	4

Question	Answer	Marks																																																																																
6(a)	<p>One mark for working, all four columns P, Q, R and S One mark for first four rows of column Z One mark for second four rows of column Z</p> <table border="1" data-bbox="338 352 1245 1007"> <thead> <tr> <th colspan="8" data-bbox="680 352 1131 416">Working space</th> </tr> <tr> <th data-bbox="338 416 450 480">A</th> <th data-bbox="450 416 562 480">B</th> <th data-bbox="562 416 674 480">C</th> <th data-bbox="674 416 786 480">P</th> <th data-bbox="786 416 898 480">Q</th> <th data-bbox="898 416 1010 480">R</th> <th data-bbox="1010 416 1122 480">S</th> <th data-bbox="1122 416 1245 480">Z</th> </tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td> </tr> <tr> <td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td> </tr> <tr> <td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>1</td><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td> </tr> <tr> <td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td> </tr> <tr> <td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td> </tr> </tbody> </table>	Working space								A	B	C	P	Q	R	S	Z	0	0	0	1	0	0	1	1	0	0	1	1	0	0	1	1	0	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1	0	0	1	0	0	0	0	1	0	1	1	0	1	0	1	1	1	0	0	0	0	1	1	1	1	1	0	1	0	1	1	3
Working space																																																																																		
A	B	C	P	Q	R	S	Z																																																																											
0	0	0	1	0	0	1	1																																																																											
0	0	1	1	0	0	1	1																																																																											
0	1	0	0	0	0	0	0																																																																											
0	1	1	0	0	0	0	0																																																																											
1	0	0	1	0	0	0	0																																																																											
1	0	1	1	0	1	0	1																																																																											
1	1	0	0	0	0	1	1																																																																											
1	1	1	0	1	0	1	1																																																																											
6(b)	<p>Two marks for all five correct terms and no extras One mark for any three correct terms</p> <p>$(Z =) \bar{A}.\bar{B}.\bar{C} + \bar{A}.\bar{B}.C + A.\bar{B}.\bar{C} + A.B.\bar{C} + A.B.C$</p>	2																																																																																

Question	Answer	Marks																								
6(c)(i)	<p>Two marks if all correct One mark if one error present</p> <table border="1"> <tr> <td></td> <td>BC</td> <td>00</td> <td>01</td> <td>11</td> <td>10</td> </tr> <tr> <td>A</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>0</td> <td></td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td></td> <td>1</td> <td>1</td> <td>1</td> <td>1</td> </tr> </table>		BC	00	01	11	10	A						0		1	1	0	0	1		1	1	1	1	2
	BC	00	01	11	10																					
A																										
0		1	1	0	0																					
1		1	1	1	1																					
6(c)(ii)	<p>One mark for each correct loop (Max 2)</p> <table border="1"> <tr> <td></td> <td>BC</td> <td>00</td> <td>01</td> <td>11</td> <td>10</td> </tr> <tr> <td>A</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>0</td> <td></td> <td>1</td> <td>1</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td></td> <td>1</td> <td>1</td> <td>1</td> <td>1</td> </tr> </table>		BC	00	01	11	10	A						0		1	1	0	0	1		1	1	1	1	2
	BC	00	01	11	10																					
A																										
0		1	1	0	0																					
1		1	1	1	1																					
6(c)(iii)	A + <u>B</u>	1																								

Question	Answer	Marks
7(a)	<p>One mark per point (max 3)</p> <p>MP1 A digital certificate is an electronic/online document.</p> <p>MP2 used to authenticate/prove the identity of a website/the online identity of an individual/organisation</p> <p>MP3 typically issued by a CA</p> <p>MP4 For example: it contains information identifying a website owner/individual and a public key</p>	3
7(b)	<p>One mark per point (max 2)</p> <p>MP1 The digital certificate provides the public key</p> <p>MP2 ... that can be used to validate the private key associated with the organisation/website/digital signature</p>	2

Question	Answer	Marks
8(a)	<p>One mark for each correctly completed clause (Max 3)</p> <p>(23) <code>feature(sliding_doors).</code> (24) <code>available(sliding_doors, minivan).</code> (25) <code>unavailable(sliding_doors, hatchback).</code></p>	3
8(b)	<code>(Options =) sunroof, reversing_camera</code>	1
8(c)	<p>One mark per mark point (Max 4)</p> <p>MP1 <code>feature(F)</code> MP2 <code>bodystyle(B)</code> MP3 <code>unavailable(F, B)</code> MP4 all correct Boolean operators and punctuation (allow , for AND) and no additional lines of code</p> <p>Example answers</p> <pre>may_choose_option(F, B) IF feature(F) AND bodystyle(B) AND NOT unavailable(F, B). feature(F), bodystyle(B), NOT unavailable(F, B).</pre>	4

Question	Answer	Marks
9	<p>One mark per mark point (Max 3)</p> <p>MP1 Deep learning learns by finding hidden patterns that are undetectable to humans. MP2 It structures algorithms in layers: input layer, hidden layers and output layer. MP3 ... to create an artificial neural network to learn and make intelligent decisions on its own. MP4 It is trained using large quantities of unlabelled data. MP5 Deep learning requires/uses a large number of hidden layers. MP6 ... the larger the number of layers, the higher the level of success.</p>	3

Question	Answer	Marks
10(a)	<p>One mark The elements are sorted according to the compare function / in ascending / descending order.</p>	1
10(b)	<p>One mark for each correctly completed line (Max 5)</p> <pre> DECLARE Names : ARRAY[1:100000] OF STRING DECLARE TopOfList : INTEGER DECLARE EndOfList : INTEGER DECLARE CurrentItem : INTEGER DECLARE ToFind : STRING DECLARE Found : BOOLEAN DECLARE NotInList : BOOLEAN TopOfList ← 1 EndOfList ← 100000 OUTPUT "Which name do you wish to find? " INPUT ToFind Found ← FALSE NotInList ← FALSE WHILE Found = FALSE AND NotInList = FALSE CurrentItem ← (TopOfList + EndOfList) DIV 2 IF ToFind = Names[CurrentItem] // Names[CurrentItem] = ToFind THEN Found ← TRUE ELSE IF TopOfList >= EndOfList THEN NotInList ← TRUE ELSE IF ToFind > Names[CurrentItem] THEN TopOfList ← CurrentItem + 1 ELSE EndOfList ← CurrentItem - 1 ENDIF ENDIF ENDIF ENDWHILE </pre>	5

PUBLISHED

Question	Answer	Marks
10(b)	<pre>IF Found = TRUE THEN OUTPUT "Item found at position ", CurrentItem, " inarray" ELSE OUTPUT "Item not in array" ENDIF</pre>	
10(c)	<p>One mark from MP1 Big O for a binary search is $O(\log_2 n)$. MP2 Big O notation is used to indicate the time/space complexity of an algorithm.</p> <p>One mark from MP3 The time taken to complete the search increases logarithmically as the number of search items increases linearly MP4 The time taken to complete the search increases linearly as the number of search items increases exponentially MP5 As the search field is repeatedly getting smaller, the number of comparisons made before the item is found, or the number of items runs out, is relatively small.</p>	2

PUBLISHED

Question	Answer	Marks
11(a)	<p>One mark per mark point (Max 2)</p> <p>MP1 Uses hard-wired code/control units</p> <p>MP2 Uses relatively few instructions / simple instructions</p> <p>MP3 Uses relatively few addressing modes</p> <p>MP4 Makes use of a single-cycle for each instruction</p> <p>MP5 Makes use of fixed length / fixed format instructions</p> <p>MP6 Makes use of general-purpose registers</p> <p>MP7 Pipelining is straightforward to apply</p> <p>MP8 The design emphasis is on the software</p> <p>MP9 Processor chips require few transistors.</p>	2
11(b)	<p>One mark per mark point (Max 3)</p> <p>MP1 Once the processor detects an interrupt at the start/end of the fetch-execute cycle</p> <p>MP2 ... the current program is temporarily stopped and the status of each register stored on the stack.</p> <p>MP3 After the interrupt has been serviced/the Interrupt Service Routine (ISR) has been executed ...</p> <p>MP4 ... the registers can be restored to its original status before the interrupt was detected // ... the data can be restored from the stack.</p>	3
11(c)	<p>One mark per mark point (Max 3)</p> <p>MP1 Pipelining adds an additional complexity // there could be a number of instructions still in the pipeline when the interrupt is received</p> <p>MP2 All the instructions currently in operation are usually discarded except for the last one/the one at write back</p> <p>MP3 ... the interrupt handler routine is applied to the remaining instruction.</p> <p>MP4 Once the interrupt has been serviced the processor can restart with the next instruction in the sequence.</p>	3